



3000 PWC JET SKI LIFT

IMM QUALITY
— BOAT LIFTS —



3000 PWC Jet Ski Lift

The 3000 PWC jet ski lift is ideal for everything from jet skis, jet boats, sea kayaks and small skiffs.


The 3000 PWC jetski lifts were designed for use with personal watercraft under 3,000 pounds and 16 feet in length.

When fitted with through-flow decking, the 3000 PWC lift is ideal for use with kayaks and other portable vessels.

Available with one- or two-piece tracks and either seawall, dock or piling mounts, the 3000 PWC jetski lifts are sure to work for any application.

FEATURES AND OPTIONS

Platinum Vertical Lift Standard Features

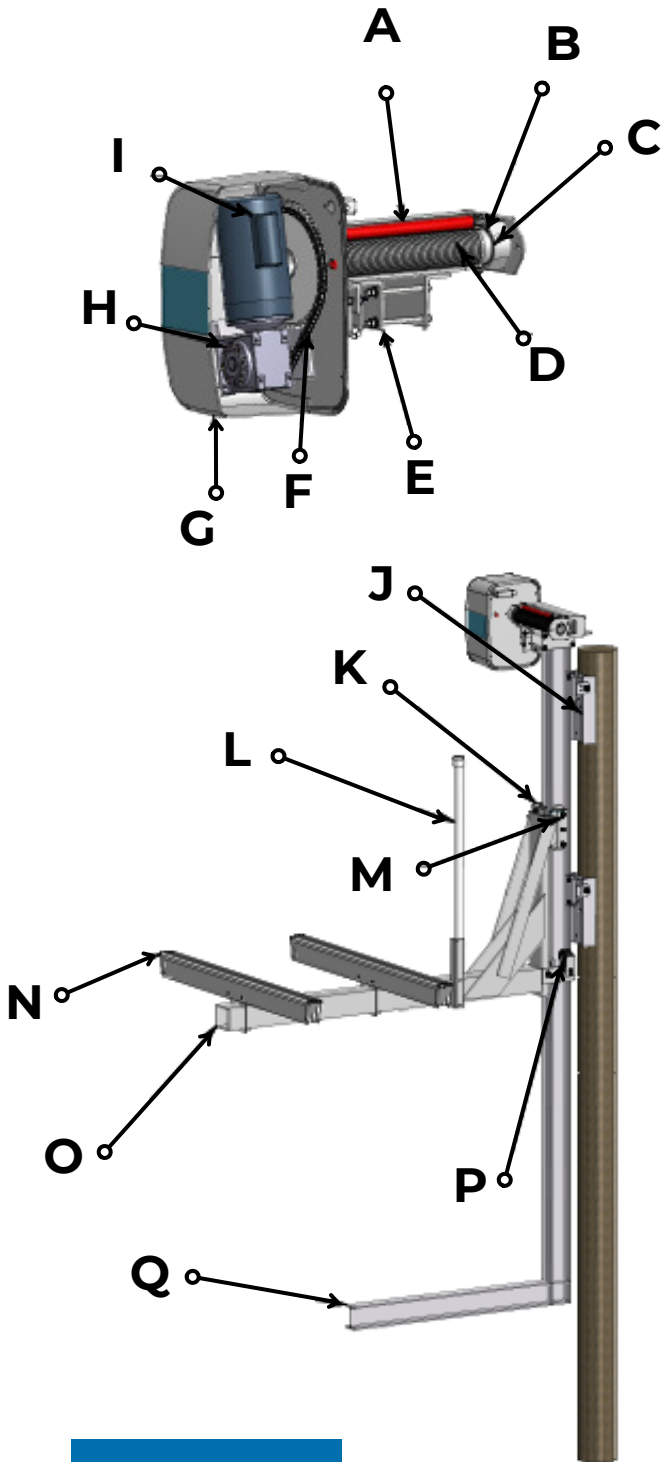

- A** Roller cable keepers prevent snarl and overlap.
- B** Engineered tribopolymer shaft bearings are lubrication and corrosion free. High load capacity provides industry best durability. These no maintenance bearings reduce service costs.
- C** Depending on model, drive shaft is either heavy wall aluminum tube or heavy gauge high torque capacity drive tube with Gatorshield electro-plating to prevent corrosion.
- D** 3-1/2" diameter cable friendly grooved winder extends cable life. Grooves ensure proper cable winding. Industry best standard travel of up to twenty feet.
- E** Easy install track mount brackets require no drilling.
- F** Heavy duty chain supplies high shock load capability. A positive drive transmission, therefore no belt slippage as seen on inferior flat plate drives.
- G** Heavy duty rotomolded covers protect mechanical and electrical components from the elements.
- H** Sealed maintenance free worm gearbox with heavy duty tapered roller bearings.
- I** Continuous duty, high service factor electrical motor.
- J** Thru-bolted pile mount bracket comes pre-assembled and allows for angular adjustment of the tracks.
- K** Maintenance free pulleys with self-lubricating bearings.
- L** Heavy duty reinforced guide post base with pvc covered guide post which is easy to adjust.
- M** Pivoting upper roller brackets ensures equal loading on all roller wheels. High durability aluminum roller wheels with self-lubricating bearings.
- N** Shown with upgraded custom extruded aluminum bunks with UV resistant non-marring pvc caps. Pressure treated fully carpeted wood bunks standard.
- O** Heavy duty rectangular tube construction provides superior strength and stiffness versus I-Beam designs. Simplified design provides sturdy support for the bunks.
- P** Side guide nylon wheels keep the carriage in the proper position and provides smooth operation.
- Q** Marine grade 6061-T6 corrosion resistant aluminum and stainless steel construction. Equipped with zinc anodes to protect against electrolysis.

OPTIONS

- Through flow decking
- Aluminum dock ladder
- Wireless remote controls, both standard and with auto stops

- Solar power
- High-speed version is twice as fast. Also available with the Platinum drive.
- Custom aluminum bunks